


Weld Adapters  
Long Hose - 14WHRL


Feature:

- suitable for use with band clamps

Sanitary Fittings




Tube OD	Dimensions		Wall Thickness	316L Stainless Steel Part #
	A	B		
1"	3.000"	1.030"	.116"	<b>14WHRL-R100</b>
1½"	4.500"	1.530"	.116"	<b>14WHRL-R150</b>
2"	4.500"	2.030"	.116"	<b>14WHRL-R200</b>
2½"	5.000"	2.530"	.116"	<b>14WHRL-R250</b>
3"	5.000"	3.030"	.116"	<b>14WHRL-R300</b>
4"	4.875"	4.030"	.116"	<b>14WHRL-R400</b>

Use of PVC tubing requires special installation techniques to prevent leakage. All assembly work must be done with heated tube. Cold durometer is 90 as opposed to rubber hose at 65 to 70 durometer. Banding buckles must be at 180° from one another. 

3

Polished Weld Reducers


Concentric - B31W

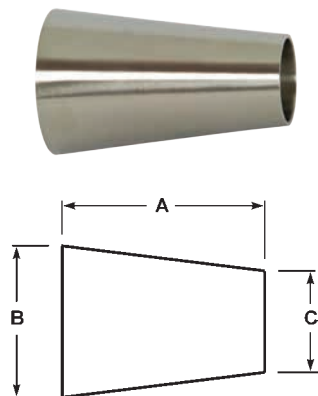

Tube OD	Dimensions			Wall Thickness	Polished ID/OD 304 Stainless Steel Part #	Polished ID/OD 316L Stainless Steel Part #
	A	B	C			
¾" x ½"	1.000"	.750"	.500"	.065"	---	<b>B31W-R7550P</b>
1" x ½"	2.000"	1.000"	.500"	.065"	---	<b>B31W-R10050P</b>
1" x ¾"	1.000"	1.000"	.750"	.065"	---	<b>B31W-R10075P</b>
1½" x ¾"	3.000"	1.500"	.750"	.065"	---	<b>B31W-R15075P</b>
1½" x 1"	2.000"	1.500"	1.000"	.065"	<b>B31W-G150100P</b>	<b>B31W-R150100P</b>
2" x 1"	4.000"	2.000"	1.000"	.065"	<b>B31W-G200100P</b>	<b>B31W-R200100P</b>
2" x 1½"	2.000"	2.000"	1.500"	.065"	<b>B31W-G200150P</b>	<b>B31W-R200150P</b>
2½" x 1½"	4.000"	2.500"	1.500"	.065"	<b>B31W-G250150P</b>	<b>B31W-R250150P</b>
2½" x 2"	2.000"	2.500"	2.000"	.065"	<b>B31W-G250200P</b>	<b>B31W-R250200P</b>
3" x 1½"	6.000"	3.000"	1.500"	.065"	<b>B31W-G300150P</b>	<b>B31W-R300150P</b>
3" x 2"	4.000"	3.000"	2.000"	.065"	<b>B31W-G300200P</b>	<b>B31W-R300200P</b>
3" x 2½"	2.000"	3.000"	2.500"	.065"	<b>B31W-G300250P</b>	<b>B31W-R300250P</b>
4" x 2"	8.000"	4.000"	2.000"	.083"	<b>B31W-G400200P</b>	<b>B31W-R400200P</b>
4" x 2½"	6.000"	4.000"	2.500"	.083"	<b>B31W-G400250P</b>	<b>B31W-R400250P</b>
4" x 3"	4.000"	4.000"	3.000"	.083"	<b>B31W-G400300P</b>	<b>B31W-R400300P</b>
6" x 3"	5.500"	6.000"	3.000"	.109"	<b>B31W-G600300P</b>	<b>B31W-R600300P</b>
6" x 4"	5.500"	6.000"	4.000"	.109"	<b>B31W-G600400P</b>	<b>B31W-R600400P</b>

3

Eccentric - B32W

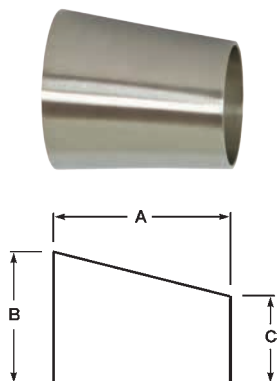

Tube OD	Dimensions			Wall Thickness	Polished ID/OD 304 Stainless Steel Part #	Polished ID/OD 316L Stainless Steel Part #
	A	B	C			
1" x ½"	2.000"	1.000"	.500"	.065"	---	<b>B32W-R10050P</b>
2" x 1"	4.000"	2.000"	1.000"	.065"	<b>B32W-G200100P</b>	<b>B32W-R200100P</b>
2" x 1½"	2.000"	2.000"	1.500"	.065"	<b>B32W-G200150P</b>	<b>B32W-R200150P</b>
2½" x 2"	2.000"	2.500"	2.000"	.065"	<b>B32W-G250200P</b>	<b>B32W-R250200P</b>
3" x 2"	4.000"	3.000"	2.000"	.065"	<b>B32W-G300200P</b>	<b>B32W-R300200P</b>
3" x 2½"	2.000"	3.000"	2.500"	.065"	<b>B32W-G300250P</b>	<b>B32W-R300250P</b>
4" x 2"	8.000"	4.000"	2.000"	.083"	<b>B32W-G400200P</b>	<b>B32W-R400200P</b>
4" x 3"	4.000"	4.000"	3.000"	.083"	<b>B32W-G400300P</b>	<b>B32W-R400300P</b>