

Tube Hangers


Hex with Nitrile Grommets - B24RG

Features:

- replacement grommets are available, contact Dixon®
- nitrile grommets; maximum temperature: 230°F (110°C)

Tube OD	Dimensions		304 Stainless Steel Part #
	A	B	
½" - ¾"	3.425"	1.450"	<b>B24RG-G75</b>
1"	3.425"	1.450"	<b>B24RG-G100</b>
1½"	4.000"	2.125"	<b>B24RG-G150</b>
2"	4.500"	2.500"	<b>B24RG-G200</b>
2½"	4.950"	3.125"	<b>B24RG-G250</b>
3"	5.500"	3.750"	<b>B24RG-G300</b>
4"	6.950"	4.750"	<b>B24RG-G400</b>
5"	8.000"	5.625"	<b>B24RG-G500</b>
6"	9.250"	6.625"	<b>B24RG-G600</b>
8"	11.500"	8.625"	<b>B24RG-G800</b>

Sanitary Fittings

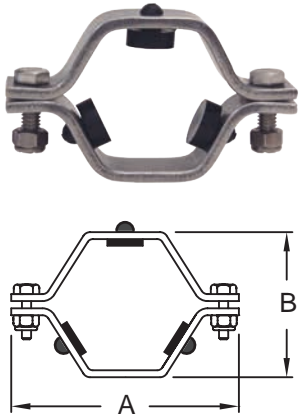


Round with Nitrile Inserts - B24RPH

Feature:

- Nitrile inserts
- maximum temperature: 230°F (110°C)

Tube OD	Dimensions		304 Stainless Steel Part #
	A	B	
½"	2.750"	1.125"	<b>B24RPH-G50</b>
¾"	2.750"	1.125"	<b>B24RPH-G75</b>
1"	3.310"	1.500"	<b>B24RPH-G100</b>
1½"	3.810"	2.000"	<b>B24RPH-G150</b>
2"	4.250"	2.562"	<b>B24RPH-G200</b>
2½"	5.000"	3.000"	<b>B24RPH-G250</b>
3"	5.500"	3.562"	<b>B24RPH-G300</b>
4"	6.500"	4.688"	<b>B24RPH-G400</b>

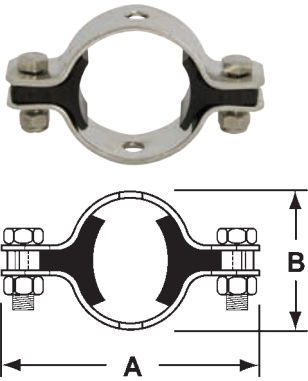


Nuts and Bolts - 13NHN

Features:


- hex hangers with grommets and round hangers 1" to 4" use 13NHN-G100-600 fastener sets
- ½" and ¾" round and sleeved hangers use 13NHN-G75 fastener sets
- 2 nuts and bolts supplied to a set

Size	Description	304 Stainless Steel Part #
½" - ¾"	¼"-20 x ¾" bolt with nylock nut	<b>13NHN-G75</b>
1" - 12"	5/16"-18 x 1" bolt with nylock nut	<b>13NHN-G100-600</b>



Wall Flanges - B25

Tube OD	Dimensions		Wall Thickness	304 Stainless Steel Part #
	A	B		
½"	.50"	3.00"	.065"	<b>B25-G050300</b>
½"	.50"	5.00"	.065"	<b>B25-G050500</b>
¾"	.75"	3.00"	.065"	<b>B25-G075300</b>
¾"	.75"	5.00"	.065"	<b>B25-G075500</b>
1"	1.00"	3.00"	.065"	<b>B25-G100300</b>
1"	1.00"	5.00"	.065"	<b>B25-G100500</b>
1½"	1.50"	5.00"	.065"	<b>B25-G150500</b>
2"	2.00"	5.00"	.065"	<b>B25-G200500</b>
2½"	2.50"	5.00"	.065"	<b>B25-G250500</b>
3"	3.00"	6.00"	.065"	<b>B25-G300600</b>
4"	4.00"	7.00"	.065"	<b>B25-G400700</b>
5"	5.00"	8.00"	.065"	<b>B25-G500800</b>
6"	6.00"	10.00"	.065"	<b>B25-G6001000</b>
8"	8.00"	12.00"	.065"	<b>B25-G8001200</b>
10"	10.00"	14.00"	.065"	<b>B25-G10001400</b>
12"	12.00"	16.00"	.065"	<b>B25-G12001600</b>

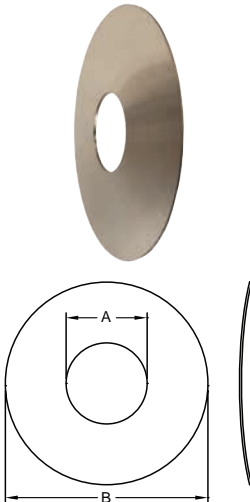

**NEW**