

## Premium Duty Spring Retractable Hose Reels

### Series 3000 - Air/Water - 1/4", 3/8" I.D.

- Ultra-compact for a wide range of bench mount or mobile applications with critical space requirements
- Compact size - reel easily fits within a 1 ft. x 1 ft. space
- Multiple slotted mounting holes to accommodate many configurations
- Inlet located on base eliminating the possibility of hose interfering with spool operation

**NEW!**



S602805 -  
Optional guide  
arm accessory


B3425 OLP

#### Additional Series 3000 Models

Cord Reels - Page 27

| Model with hose & bumper  | Shipping Weight |     | Hose I.D.  |    | Hose O.D. |    | Hose Length |     | Max Pressure | NPT(M) Hose Outlet | NPT(F) Reel Inlet | NPT(F) Reel Outlet |     |
|---|-----------------|-----|--|----|-----------|----|-------------|-----|--------------|--------------------|-------------------|--------------------|-----|
|   | lbs             | kg  | in   | mm | in        | mm | ft          | m   |              |                    |                   |                    |     |
| <b>Low Pressure Air / Water Hose Reels</b> Maximum temperature 150 °F (65 °C) |                 |     |  |    |           |    |             |     |              |                    |                   |                    |     |
| B3425 OLP   | 18              | 8.2 | 1/4  | 6  | .475      | 12 | 25          | 7.6 | 300          | 21                 | 1/4               | 3/8                | 3/8 |
| B3610 OLP   | 17              | 7.7 | 3/8  | 10 | .600      | 15 | 10          | 3.0 | 300          | 21                 | 1/4               | 3/8                | 3/8 |
| B3620 OLP   | 18              | 8.2 | 3/8  | 10 | .600      | 15 | 20          | 6.1 | 300          | 21                 | 1/4               | 3/8                | 3/8 |
| S602805   | 1.1             | 0.5 | Optional guide arm accessory for multiple adjustment positions |    |           |    |             |     |              |                    |                   |                    |     |

Low pressure reels supplied with PVC hose.

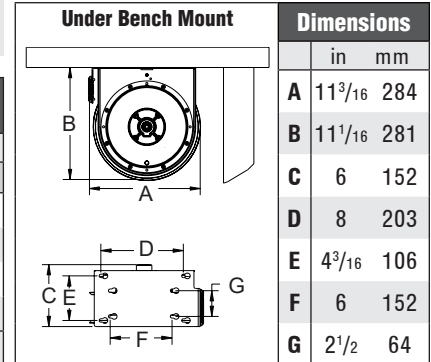

## Premium Duty Spring Retractable Reels

### Series 4000 - Air/Water - 1/4", 3/8" I.D.



- Compact for a wide range of applications with critical space requirements
- Guide arm adjusts to two positions
- Inlet hose is plumbed into the base to eliminate the risk of stress on the swivel

#### Additional Series 4000 Models

Cord Reels - Page 27-30

Series 4000 reels include a speed latch mechanism that uses a cam and disc for quiet operation.


Models with a ★ icon are our most popular models.

| Model with hose & bumper   | Shipping Weight |    | Hose I.D. |    | Hose O.D. |    | Hose Length |    | *Max Pressure | NPT(M) Hose Outlet | NPT(F) Reel Inlet | NPT(F) Reel Outlet |     |
|--|-----------------|----|-----------|----|-----------|----|-------------|----|---------------|--------------------|-------------------|--------------------|-----|
|  | lbs             | kg | in        | mm | in        | mm | ft          | m  |               |                    |                   |                    |     |
| <b>Low Pressure Air/Water Reels</b> Maximum Temperature 150 °F (65 °C) |                 |    |           |    |           |    |             |    |               |                    |                   |                    |     |
| 4420 OLP   | 18              | 8  | 1/4       | 6  | .475      | 12 | 20          | 6  | 300           | 21                 | 1/4               | 3/8                | 1/4 |
| 4425 OLP   | 19              | 9  | 1/4       | 6  | .475      | 12 | 25          | 8  | 300           | 21                 | 1/4               | 3/8                | 1/4 |
| 4435 OLP   | 19              | 9  | 1/4       | 6  | .475      | 12 | 35          | 11 | 300           | 21                 | 1/4               | 3/8                | 1/4 |
| 4625 OLP ★   | 20              | 9  | 3/8       | 10 | .600      | 15 | 25          | 8  | 300           | 21                 | 1/4               | 3/8                | 1/4 |

Low pressure reels supplied with PVC hose. See operating instructions for optimum mounting configuration. \*Maximum working pressure at 70 °F (20 °C)



4625 OLP

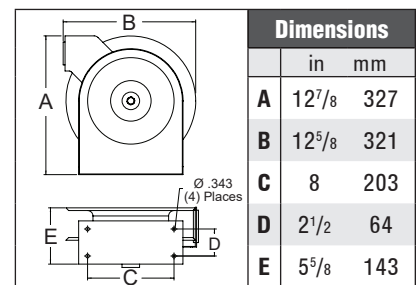

#### Interactive Reel Catalog

Visit [reelcraft.com/catalog](http://reelcraft.com/catalog) for complete product specifications, available parts, and accessories.



#### Pivot Bases & Swing Brackets

See page 39

| Model without hose & bumper  | Shipping Weight |    | Hose Capacity |      |        | Max Pressure | NPT(F) Reel Inlet | NPT(F) Reel Outlet |     |    |     |     |
|--|-----------------|----|---------------|------|--------|--------------|-------------------|--------------------|-----|----|-----|-----|
|  | lbs             | kg | I.D.          | O.D. | Length |              |                   |                    |     |    |     |     |
| <b>Low Pressure Air/Water Reels</b> Maximum Temperature 210 °F (99 °C) |                 |    |               |      |        |              |                   |                    |     |    |     |     |
| 4400 OLP   | 17              | 8  | 1/4           | 6    | .475   | 12           | 35                | 11                 | 500 | 35 | 3/8 | 1/4 |
| 4600 OLP   | 17              | 8  | 3/8           | 10   | .600   | 15           | 25                | 8                  | 500 | 35 | 3/8 | 1/4 |

Prop 65: ⚠️ WARNING:

Cancer and Reproductive Harm [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

1.800.444.3134  
[www.reelcraft.com](http://www.reelcraft.com)

